


SKEFF




PROFILES & INFILL PANELS




code	type
09.06200-9999	double lateral profile

not more than 3 metres in one piece!
niet meer dan 3 meter in één stuk!
pas plus de 3 mètres en une seule pièce!
nicht mehr als 3 Meter in einem Stück!

END CAPS & CORNERS



code	type
01.06185-9999	end cap RAL



code	type
01.06166-0000	In-line coupler 180°




code	type
01.06110-0000	L-corner 90°

mitre cut · in verstek gezaagd · coupé en biais · auf Gehrung geschnitten

i 9999=any RAL colour powder coated
elke RAL kleur poederlak
chaque teinte RAL peint-par-poudrage
jede RAL Farbe pulverbeschichtet

LED INSERTS

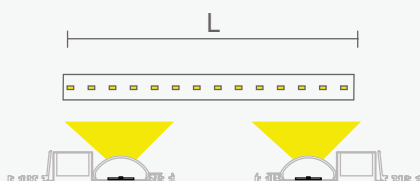

code	type
27.06617-4030	2x LED insert LO – L70mm – 0,25 insert
27.06605-4030	2x LED insert LO – L140mm – 0,5 insert
27.06615-4030	2x LED insert LO – L280mm – 1 insert
27.06625-4030	2x LED insert LO – L560mm – 2 inserts
27.06635-4030	2x LED insert LO – L840mm – 3 inserts
27.06645-4030	2x LED insert LO – L1120mm – 4 inserts
27.06655-4030	2x LED insert LO – L1400mm – 5 inserts
27.06618-4030	2x LED insert HO – L70mm – 0,25 insert
27.06606-4030	2x LED insert HO – L140mm – 0,5 insert
27.06616-4030	2x LED insert HO – L280mm – 1 insert
27.06626-4030	2x LED insert HO – L560mm – 2 inserts
27.06636-4030	2x LED insert HO – L840mm – 3 inserts
27.06646-4030	2x LED insert HO – L1120mm – 4 inserts
27.06656-4030	2x LED insert HO – L1400mm – 5 inserts

LO = low output, HO = high output



CRI>90 on request
CRI>90 op aanvraag
CRI>90 sur demande
CRI>90 auf Anfrage



code	type	dim
27.060091w-0625	LED driver 25W	-
27.060091w-0650	LED driver 50W	-
27.060091w-0675	LED driver 75W	-
27.060091w-0825	LED driver 25W	DALI/TD
27.060091w-0850	LED driver 50W	DALI/TD
27.060091w-0875	LED driver 75W	DALI/TD

LO = low output, HO = high output, TD = touch-dim, 1-10V on request

it is necessary to provide at least two drivers (one driver per wing) on the indirect side

het is noodzakelijk om aan de indirecte zijde minstens twee drivers (één driver per vleugel) te voorzien

il est nécessaire de prévoir deux drivers (un driver par profil latéral) au minimum pour la face indirecte

es ist notwendig die indirekte Seite des Profils mit mindestens zwei Treibern (einem Treiber pro Flügel) auszustatten

for each type of driver, the code to be entered (W), the current (mA), the lumen value and the range are displayed. Choose the suitable driver based on the number of


LED inserts (=range) and the lumen value - per type driver worden de in te vullen code (W), aansturing (mA), lumenwaarde en het bereik weergegeven. Kies de geschikte driver op basis van het aantal LED modules (=bereik) en de lumenwaarde - pour chaque type de driver, le code à choisir (W), le courant (mA), la valeur de lumen et la portée sont présentés. Choisissez le driver approprié en fonction du nombre de modules LED (=la portée) et la valeur de lumen - für jeden Treibertyp werden der einzugebende Code (W), die Ansteuerung (mA), der Lumenwert und der Bereich angezeigt. Wählen Sie den geeigneten Treiber gemäß der Anzahl LED Einsätze (=Bereich) und dem Lumenwert

	LO W=3 325mA 3,6W 670lm/280mm # inserts	HO W=1 150mA 3,2W 670lm/280mm # inserts	HO W=3 325mA 7,2W 1340lm/280mm # inserts
27.060091w-0625	2 - 4,25	1 - 2	1 - 2
27.060091w-0650	4,75 - 12	2,5 - 6,25	2,5 - 6
27.060091w-0675	12,25 - 19	6,5 - 9,75	6,25 - 9,5
27.060091w-0825	2 - 4,5	1 - 2,25	1 - 2,25
27.060091w-0850	4,75 - 12	2,5 - 6,25	2,5 - 6
27.060091w-0875	12,25 - 19	6,5 - 9,75	6,25 - 9,5



27= 2700K
30= 3000K
40= 4000K

for more information about the LED inserts, see pages 428-429
voor meer informatie over de LED modules zie pagina's 428-429
pour plus d'informations sur les modules LED, voir pages 428-429
für mehr Informationen zu den LED Einsätzen, siehe Seiten 428-429

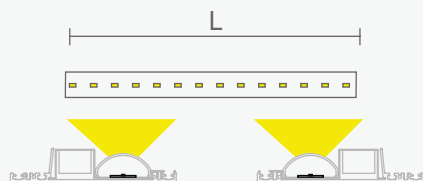


**CRI
>90**

code	type
27.06635-9030	LED TW 2700-6500K 20,5W 2100lm LO - L840mm
27.06645-9030	LED TW 2700-6500K 26,4W 2800lm LO - L1120mm
27.06655-9030	LED TW 2700-6500K 32,0W 3500lm LO - L1400mm
27.06636-9030	LED TW 2700-6500K 41,1W 4500lm HO - L840mm
27.06646-9030	LED TW 2700-6500K 54,1W 6000lm HO - L1120mm
27.06656-9030	LED TW 2700-6500K 67,3W 7500lm HO - L1400mm

HO = high output, TW = tunable white

DALI driver type 8 included · Inclusief DALI driver type 8 · driver DALI type 8 inclus · inklusive DALI Treiber Typ 8
type 6 on request · type 6 op aanvraag · type 6 sur demande · Typ 6 auf Anfrage



LED DIFFUSERS



h=91% CIE 3 10 35 6 91

code	type
02.06800-0000	satın LED diffuser indirect

ACCESSORIES



code	type
27.060202-9999	LED spotlight 9W 2700K 940lm 20°
27.060422-9999	LED spotlight 9W 2700K 940lm 42°
27.060203-9999	LED spotlight 9W 3000K 980lm 20°
27.060423-9999	LED spotlight 9W 3000K 980lm 42°
27.060204-9999	LED spotlight 9W 4000K 1020lm 20°
27.060424-9999	LED spotlight 9W 4000K 1020lm 42°

order drivers separately · voedingen apart bestellen · commandez l'alimentation séparément · Treiber separat bestellen



code	type	dim	9W-250mA # spotlights
27.0600910-0625	LED driver 25W	-	1
27.0600910-0650	LED driver 50W	-	2-3
27.0600910-0825	LED driver 25W	DALI/TD	1
27.0600910-0850	LED driver 50W	DALI/TD	2-3

TD = touch-dim




9999=any RAL colour powder coated
elke RAL kleur poederlak
chaque teinte RAL peint-par-poudrage
jede RAL Farbe pulverbeschichtet






ACCESSORIES



code	type
27.00040-9005	push switch ON/OFF 250V/10Amp
27.00041-9005	push switch ON/OFF+dimming 250V/10Amp


27.00041-9005 only with DALI/TD dimmable insert, max. 4 drivers per push switch
 27.00041-9005 enkel met DALI/TD dimbare module, max. 4 drivers per drukknop
 27.00041-9005 seulement avec module dimmable DALI/TD, 4 drivers par bouton poussoir au maximum
 27.00041-9005 nur mit DALI/TD dimmbarem Einsatz, Maximal 4 Treiber pro Druckknopf

SUSPENSIONS & CABLES




code	type
03.10002-2400	double steelwire suspension type 1 – L1800mm
03.10002-4700	double steelwire suspension type 1 – L4500mm

steelwire is adjustable on the ceiling
 staaldraad is verstelbaar aan het plafond
 le fil d'acier est réglable au plafond
 Stahldraht ist an der Decke verstellbar




code	type
03.10015-2400	black double steelwire suspension type 1 – L1800mm
03.10015-4700	black double steelwire suspension type 1 – L4500mm

steelwire is adjustable on the ceiling
 staaldraad is verstelbaar aan het plafond
 le fil d'acier est réglable au plafond
 Stahldraht ist an der Decke verstellbar




code	type
03.10012-2400	double steelwire suspension type 2 – L1800mm
03.10012-4700	double steelwire suspension type 2 – L4500mm

steelwire is adjustable on the profile
 staaldraad is verstelbaar aan het profiel
 le fil d'acier est réglable au profil
 Stahldraht ist am Profil verstellbar




code	type
03.10003-2400	double steelwire suspension pivotable – L1800mm
03.10003-4700	double steelwire suspension pivotable – L4500mm



code

type


03.99506-9999	power cable 3x0,75mm ² - L1800mm
03.99518-9999	power cable 3x1,5mm ² - L1800mm
03.99538-9999	power cable 5x0,75mm ² - L1800mm
03.99528-9999	power cable 5x1,5mm ² - L1800mm
03.99507-9999	power cable 3x0,75mm ² - L4500mm
03.99519-9999	power cable 3x1,5mm ² - L4500mm
03.99539-9999	power cable 5x0,75mm ² - L4500mm
03.99529-9999	power cable 5x1,5mm ² - L4500mm



code

type

03.99310-9999	double rod suspension - L600mm
03.99330-9999	double rod suspension - L1000mm




code

type

03.99306-9999	double rod suspension incl. 3x1,5mm ² - L600mm
03.99326-9999	double rod suspension incl. 3x1,5mm ² - L1000mm

ADDITIONAL WIRING




standard wiring

standaard bedrading
câblage standard
standard Verdrahtung

1 switching circuit with 3 cables 1,5mm²: L = phase (brown), N = neutral (blue), earthing (yellow-green)

1 schakelkring met 3 kabels 1,5mm²: L = fase (bruin), N = nulleider (blauw), aarding (geel-groen)
1 circuit avec 3 câbles 1,5mm²: L = phase (brun), N = neutre (bleu), terre (jaune-vert)
1 Schaltkreis mit 3 Kabeln 1,5mm²: L = Phase (braun), N = Nulleiter (blau), Erdung (gelb-grün)



code

type

23.00099-1150	1 cable 1,5mm ² for additional switching circuit (grey or orange or violet)
23.00099-2075	2 cables 0,75mm ² for dimming (black & red)
23.00099-2150	2 cables 1,5mm ² for emergency module supply (white & blue)



9999=any RAL colour powder coated
elke RAL kleur poederlak
chaque teinte RAL peint-par-poudrage
jede RAL Farbe pulverbeschichtet