


SCORE



PROFILES & INFILL PANELS



code type


09.87100-0001 profile ANO
09.87100-9999 profile RAL

when using only LED inserts, the correct length = (number of inserts * 280) + 24mm
bij gebruik van enkel LED modules, is de correcte lengte = (aantal modules * 280) + 24mm
en cas d'utilisation de que des modules de LED, la longueur correcte = (nombre de modules * 280) + 24mm
wenn nur LED Einsätze verwendet werden, ist die richtige Länge = (Anzahl der Einsätze * 280) + 24mm



code type

09.87102-0001 double lateral cover profile ANO
09.87102-9999 double lateral cover profile RAL




code type

09.87101-0001 infill panel ANO
09.87101-9999 infill panel RAL


is necessary where there is no LED diffuser foreseen
is nodig waar er geen LED afscherming is voorzien
est nécessaire là où il n'y a pas de diffuseur LED
ist notwendig wo keine LED Abdeckung vorgesehen ist

END CAPS & CORNERS




code type

01.87180-0001 flat end cap ANO
01.87180-9999 flat end cap RAL



code type

01.87181-0001 curved end cap ANO
01.87181-9999 curved end cap RAL



code type

01.87182-0001 end cap ANO
01.87182-9999 end cap RAL

required for fully recessed profile with flat or curved diffuser
vereist voor volledig ingebouwd profiel met vlakke of gebogen afscherming
nécessaire pour le profilé complètement encastré avec diffuseur plat ou courbé
erforderlich für komplett eingebautes Profil mit flacher oder gebogener Abdeckung



0001=anodised
geanodiseerd
anodisé
eloxiert

9999=any RAL colour powder coated. Main profile, lateral covers and infill panel can be coated in a different colour!


elke RAL kleur poederlak. Hoofdprofiel, zijdelingse afschermingen en afdekprofiel kunnen in een verschillende kleur worden gelakt!
chaque teinte RAL peint-par-poudrage. Profil de base, couvercles latéraux et couvercle plat peuvent être peints en couleurs différentes!
jede RAL Farbe pulverbeschichtet. Hauptprofil, seitliche Abdeckungen und flaches Abdeckprofil können in unterschiedliche Farben beschichtet werden!




180°

code	type
01.87160-0000	In-line coupler 180°


TRIMLESS INSTALLATION

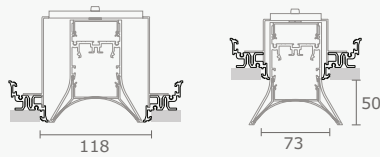


code	type
09.00007-9010	trimless finishing profile




code	type
03.87500-0012	supporting bracket recessed 12,5mm
03.87500-0015	supporting bracket recessed 15mm



code	type
03.87501-0012	supporting bracket semi-recessed 12,5mm
03.87501-0015	supporting bracket semi-recessed 15mm

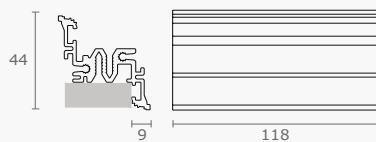

code	type
01.87900-9010	end piece finishing profile recessed

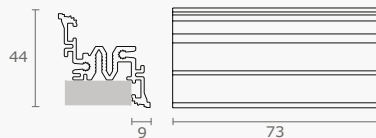


code	type
01.87902-9010	end piece finishing profile semi-recessed



9010=white RAL9010
wit RAL9010
blanc RAL9010
weiß RAL9010

LED INSERTS




code	type
27.87608-4030	LED insert HO - L70mm - 0,25 insert
27.87601-4030	LED insert HO - L140mm - 0,5 insert
27.87611-4030	LED insert HO - L280mm - 1 insert
27.87621-4030	LED insert HO - L560mm - 2 inserts
27.87631-4030	LED insert HO - L840mm - 3 inserts
27.87641-4030	LED insert HO - L1120mm - 4 inserts
27.87651-4030	LED insert HO - L1400mm - 5 inserts

HO = high output

CRI
>80

CRI>90 on request
CRI>90 op aanvraag
CRI>90 sur demande
CRI>90 auf Anfrage




code	type
27.87617-4030	LED insert LO - L70mm - 0,25 insert
27.87605-4030	LED insert LO - L140mm - 0,5 insert
27.87615-4030	LED insert LO - L280mm - 1 insert
27.87625-4030	LED insert LO - L560mm - 2 inserts

27.87618-4030	LED insert HO - L70mm - 0,25 insert
27.87606-4030	LED insert HO - L140mm - 0,5 insert
27.87616-4030	LED insert HO - L280mm - 1 insert
27.87626-4030	LED insert HO - L560mm - 2 inserts

LO = low output, HO = high output

CRI
>80

CRI>90 on request
CRI>90 op aanvraag
CRI>90 sur demande
CRI>90 auf Anfrage



code	type	dim
27.000091W-0625	LED driver 25W	-
27.000091W-0650	LED driver 50W	-
27.000091W-0675	LED driver 75W	-
27.000091W-0825	LED driver 25W	DALI/TD
27.000091W-0850	LED driver 50W	DALI/TD
27.000091W-0875	LED driver 75W	DALI/TD

LO = low output, HO = high output, TD = touch-dim, 1-10V on request


for each type of driver, the code to be entered (W), the current (mA), the lumen value and the range are displayed. Choose the suitable driver based on the number of LED inserts (=range) and the lumen value - per type driver worden de in te vullen code (W), aansturing (mA), lumenwaarde en het bereik weergegeven. Kies de geschikte driver op basis van het aantal LED modules (=bereik) en de lumenwaarde - pour chaque type de driver, le code à choisir (W), le courant (mA), la valeur de lumen et la portée sont présentés. Choisissez le driver approprié en fonction du nombre de modules LED (=la portée) et la valeur de lumen - für jeden Treibertyp werden der einzugebende Code (W), die Ansteuerung (mA), der Lumenwert und der Bereich angezeigt. Wählen Sie den geeigneten Treiber gemäß der Anzahl LED Einsätze (=Bereich) und dem Lumenwert

	LO W=3 325mA 3,6W 670lm/280mm # inserts	HO W=1 150mA 3,2W 670lm/280mm # inserts	HO W=3 325mA 7,2W 1340lm/280mm # inserts
27.000091W-0625	2 - 4,25	1 - 2	1 - 2
27.000091W-0650	4,75 - 12	2,5 - 6,25	2,5 - 6
27.000091W-0675	12,25 - 19	6,5 - 9,75	6,25 - 9,5
27.000091W-0825	2 - 4,5	1 - 2,25	1 - 2,25
27.000091W-0850	4,75 - 12	2,5 - 6,25	2,5 - 6
27.000091W-0875	12,25 - 19	6,5 - 9,75	6,25 - 9,5



27= 2700K
30= 3000K
40= 4000K

for more information about the LED inserts, see pages 428-429
voor meer informatie over de LED modules zie pagina's 428-429
pour plus d'informations sur les modules LED, voir pages 428-429
für mehr Informationen zu den LED Einsätzen, siehe Seiten 428-429




code type

27.87631-9030 LED TW 2700-6500K 41,1W 4500lm HO - L840mm
27.87641-9030 LED TW 2700-6500K 54,1W 6000lm HO - L1120mm
27.87651-9030 LED TW 2700-6500K 67,3W 7500lm HO - L1400mm

CRI
>90

HO = high output, TW = tunable white

DALI driver: type 8 included · Inclusief DALI driver type 8 · driver DALI type 8 inclus · inklusive DALI Treiber Typ 8
type 6 on request · type 6 op aanvraag · type 6 sur demande · Typ 6 auf Anfrage



code type

27.87635-9030 LED TW 2700-6500K 20,5W 2100lm LO - L840mm
27.87645-9030 LED TW 2700-6500K 26,4W 2800lm LO - L1120mm
27.87655-9030 LED TW 2700-6500K 32,0W 3500lm LO - L1400mm

27.87636-9030 LED TW 2700-6500K 41,1W 4500lm HO - L840mm
27.87646-9030 LED TW 2700-6500K 54,1W 6000lm HO - L1120mm
27.87656-9030 LED TW 2700-6500K 67,3W 7500lm HO - L1400mm

CRI
>90

LO = low output, HO = high output, TW = tunable white


DALI driver: type 8 included · Inclusief DALI driver type 8 · driver DALI type 8 inclus · inklusive DALI Treiber Typ 8
type 6 on request · type 6 op aanvraag · type 6 sur demande · Typ 6 auf Anfrage

LED DIFFUSERS




code type


02.87900-0000 flat LED diffuser direct and indirect



h=71% CIE 56 88 98 99 71




h=73% CIE 0 0 0 0 73



code type

02.87901-0000 curved LED diffuser direct



h=72% CIE 54 85 98 99 72


EMERGENCY MODULES



code	type
27.00290-0000	LED emergency 1h 350lm - selftest
27.00291-0000	LED emergency 3h 350lm - selftest
27.00292-0000	LED emergency 1h 350lm - selftest DALI
27.00293-0000	LED emergency 3h 350lm - selftest DALI

only applicable from 4 LED inserts (1h - selftest) or 6 LED inserts (3h - selftest) · min. 280-max. 560mm per driver in case of emergency
 enkel geschikt vanaf 4 LED modules (1h - selftest) of 6 LED modules (3h - selftest) · min. 280-max. 560mm per driver in noodtoestand
 seulement utilisable à partir de 4 modules LED (1h - selftest) ou 6 modules LED (3h - selftest) · min. 280-max. 560mm par driver en configuration secours
 nur geeignet ab 4 LED Einsätzen (1h - selftest) oder 6 LED Einsätzen (3h - selftest) · min. 280-max. 560mm pro Treiber im Notstand


ACCESSORIES



code	type
27.870132-9999	LED downlight 3x1W 2700K 357lm 8°
27.870232-9999	LED downlight 3x1W 2700K 357lm 32°
27.870133-9999	LED downlight 3x1W 3000K 378lm 8°
27.870233-9999	LED downlight 3x1W 3000K 378lm 32°
27.870134-9999	LED downlight 3x1W 4000K 399lm 8°
27.870234-9999	LED downlight 3x1W 4000K 399lm 32°

order drivers separately · voedingen apart bestellen · commandez l'alimentation séparément · Treiber separat bestellen


not possible in combination with a curved diffuser
 niet mogelijk in combinatie met gebogen afscherming
 pas possible en combinaison avec un diffuseur courbé
 nicht möglich in Kombination mit einer gebogenen Abdeckung



code	type
27.870142-9999	LED downlight 4x1W 2700K 476lm 8°
27.870242-9999	LED downlight 4x1W 2700K 476lm 32°
27.870143-9999	LED downlight 4x1W 3000K 504lm 8°
27.870243-9999	LED downlight 4x1W 3000K 504lm 32°
27.870144-9999	LED downlight 4x1W 4000K 532lm 8°
27.870244-9999	LED downlight 4x1W 4000K 532lm 32°

order drivers separately · voedingen apart bestellen · commandez l'alimentation séparément · Treiber separat bestellen

not possible in combination with a curved diffuser
 niet mogelijk in combinatie met gebogen afscherming
 pas possible en combinaison avec un diffuseur courbé
 nicht möglich in Kombination mit einer gebogenen Abdeckung



code	type	dim	3x1W-350mA # downlights	4x1W-350mA # downlights
27.0000917-0608	LED driver 8W	-	1-2	1
27.0000917-0625	LED driver 25W	-	3-5	2-4
27.0000917-0650	LED driver 50W	-	6-14	5-10
27.0000917-0810	LED driver 10W	DALI	1-3	1-2
27.0000917-0825	LED driver 25W	DALI/TD	3-5	2-4
27.0000917-0850	LED driver 50W	DALI/TD	6-14	5-10


TD = touch-dim



9999=any RAL colour powder coated
 elke RAL kleur poederlak
 chaque teinte RAL peint-par-poudrage
 jede RAL Farbe pulverbeschichtet








code	type
27.000152-9999	spot 5W 2700K 482lm 10°
27.000252-9999	spot 5W 2700K 482lm 25°
27.000352-9999	spot 5W 2700K 482lm 40°
27.000153-9999	spot 5W 3000K 500lm 10°
27.000253-9999	spot 5W 3000K 500lm 25°
27.000353-9999	spot 5W 3000K 500lm 40°
27.000154-9999	spot 5W 4000K 532lm 10°
27.000254-9999	spot 5W 4000K 532lm 25°
27.000354-9999	spot 5W 4000K 532lm 40°



order drivers separately · voedingen apart bestellen · commandez l'alimentation séparément · Treiber separat bestellen

not possible in combination with a curved diffuser
niet mogelijk in combinatie met gebogen afscherming
pas possible en combinaison avec un diffuseur courbé
nicht möglich in Kombination mit einer gebogenen Abdeckung




code	type	dim	5W-200mA # spots
27.0000916-0625	LED driver 25W	-	1-2
27.0000916-0650	LED driver 50W	-	3-5
27.0000916-0825	LED driver 25W	DALI/TD	1-2
27.0000916-0850	LED driver 50W	DALI/TD	3-5

TD = touch-dim



code	type
27.00040-9005	push switch ON/OFF 250V/10Amp
27.00041-9005	push switch ON/OFF+dimming 250V/10Amp

27.00040-9005 only with DALI/TD dimmable insert, max. 4 drivers per push switch
27.00040-9005 enkel met DALI/TD dimbare module, max. 4 drivers per drukknop
27.00040-9005 seulement avec module dimmable DALI/TD, 4 drivers par bouton poussoir au maximum
27.00040-9005 nur mit DALI/TD dimmbarem Einsatz, Maximal 4 Treiber pro Druckknopf



code	type
27.00105-0000	motion detector max. 2 drivers

stand-alone system that cannot be connected in parallel



9999=any RAL colour powder coated
elke RAL kleur poederlak
chaque teinte RAL peint-par-poudrage
jede RAL Farbe pulverbeschichtet

code type


27.00106-0000 white daylight and/or motion detector – max. 2x 5 drivers
27.00106-9005 black daylight and/or motion detector – max. 2x 5 drivers

only with DALI dimmable insert - enkel met DALI dimbare module · seulement avec module dimmable DALI · nur mit DALI dimmbarem Einsatz

including remote control for on/off + dimming

inclusief afstandsbediening voor aan/uit + dimmen
commande inclus pour allumer/éteindre + régler l'intensité de la lumière
Fernbedienung einbegriffen um ein-/aus zu schalten + zu dimmen

stand-alone system that cannot be connected in parallel



code type


22.99122-0000 remote control

to order together with the daylight & motion detector (27.00106-0000)

remote control suitable for extensive configuration of sensor (only motion, only daylight or both,...)


afstandsbediening geschikt voor uitgebreide instelling van sensor (enkel beweging, enkel daglicht of beide,...)
commande appropriée pour le réglage du détecteur (seulement du mouvement, seulement de la lumière du jour ou tous les deux,...)
Fernbedienung geeignet für ausführliche Einstellung des Sensors (nur Bewegung, nur Tageslicht oder beide,...)

FIXATIONS




code type

03.87204-0000 bracket for perpendicular wall fixation

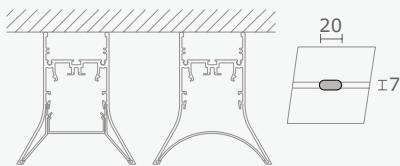

code type

03.87206-0000 slot for direct mounting

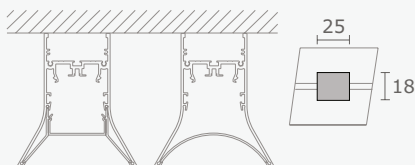


code type

03.87205-0000 entry hole for power cable

center of power supply hole at minimum 35mm from the end


center van voedingsgat op minimum 35mm van het uiteinde
centre du trou d'alimentation à au moins 35mm de l'extrémité
Mitte der Öffnung für die Einspeisung mindestens 35mm vom Ende entfernt

SUSPENSIONS & CABLES




code	type
03.99100-2400	steelwire suspension type 1 – L1800mm
03.99100-4700	steelwire suspension type 1 – L4500mm

steelwire is adjustable on the ceiling
 staaldraad is verstelbaar aan het plafond
 le fil d'acier est réglable au plafond
 Stahldraht ist an der Decke verstellbar




code	type
03.99113-2400	black steelwire suspension type 1 – L1800mm
03.99113-4700	black steelwire suspension type 1 – L4500mm

steelwire is adjustable on the ceiling
 staaldraad is verstelbaar aan het plafond
 le fil d'acier est réglable au plafond
 Stahldraht ist an der Decke verstellbar




code	type
03.99110-2400	steelwire suspension type 2 – L1800mm
03.99110-4700	steelwire suspension type 2 – L4500mm


steelwire is adjustable on the profile
 staaldraad is verstelbaar aan het profiel
 le fil d'acier est réglable au profil
 Stahldraht ist am Profil verstellbar



code	type
03.99183-0000	steelwire suspension pivotable – L1800mm
03.99185-0000	steelwire suspension pivotable – L4500mm




code	type
03.99506-9999	power cable 3x0,75mm ² – L1800mm
03.99518-9999	power cable 3x1,5mm ² – L1800mm
03.99538-9999	power cable 5x0,75mm ² – L1800mm
03.99528-9999	power cable 5x1,5mm ² – L1800mm
03.99507-9999	power cable 3x0,75mm ² – L4500mm
03.99519-9999	power cable 3x1,5mm ² – L4500mm
03.99539-9999	power cable 5x0,75mm ² – L4500mm
03.99529-9999	power cable 5x1,5mm ² – L4500mm



code	type
03.99210-9999	rod suspension – L600mm
03.99230-9999	rod suspension – L1000mm



9999=any RAL colour powder coated
 elke RAL kleur poederlak
 chaque teinte RAL peint-par-poudre
 jede RAL Farbe pulverbeschichtet



code

03.99206-9999
03.99226-9999

type

rod suspension incl. 3x1,5mm² – L600mm
rod suspension incl. 3x1,5mm² – L1000mm

ADDITIONAL WIRING




standard wiring

standaard bedrading
câblage standard
standard Verdrahtung

1 switching circuit with 3 cables 1,5mm²: L = phase (brown), N = neutral (blue), earthing (yellow-green)

1 schakelkring met 3 kabels 1,5mm²: L = fase (bruin), N = nulleider (blauw), aarding (geel-groen)
1 circuit avec 3 câbles 1,5mm²: L = phase (brun), N = neutre (bleu), terre (jaune-vert)
1 Schaltkreis mit 3 Kabeln 1,5mm²: L = Phase (braun), N = Nulleiter (blau), Erdung (gelb-grün)



code

23.00099-1150
23.00099-2075
23.00099-2150

type

1 cable 1,5mm² for additional switching circuit (grey or orange or violet)
2 cables 0,75mm² for dimming (black & red)
2 cables 1,5mm² for emergency module supply (white & blue)



9999=any RAL colour powder coated
elke RAL kleur poederlak
chaque teinte RAL peint-par-poudrage
jede RAL Farbe pulverbeschichtet



