MULTILINE®
bright with light

Rekta 40x70 Direct - MPO - HO 325mA - RAL 05.09214654-9999



Fixture details


Mounting	Ceiling
Light emission	Direct
Fitting cover	micro prismatic diffuser
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD


Lamp details

Lamptype	LED 4000K
Wattage	7,1W
Gross luminous flux	7125
Luminaire power	39,3W
Number	5
Lifetime LED module	L80/B10 > 102000h
Color tolerance	MacAdam 3
CRI	>80

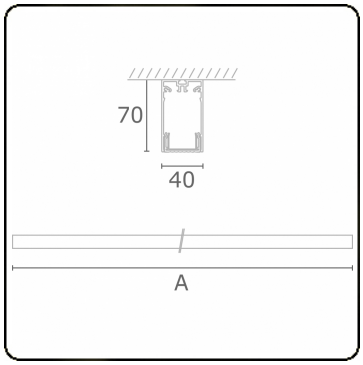

Photometric details

UGR	>19
CIE Fluxcode	58 89 98 100 50

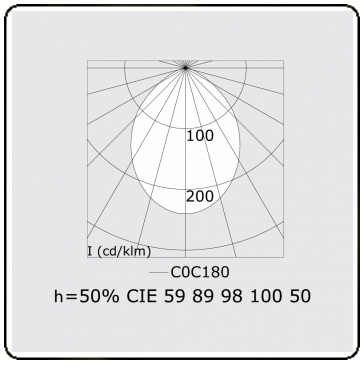

Dimensions

A	1410 mm

Remarks

Ceiling luminaire - Direct - HO 325mA - MPO - RAL

