


Rekta 40x70 Direct - satin - HO 150mA - ANO
07.09204574-0001

Fixture details

Mounting	Ceiling recessed
Light emission	Direct
Fitting cover	satin diffusor
Protection rate	IP 20
Housing	Aluminium
Finish	anodized finish
Certificates	CE, ISO 9001

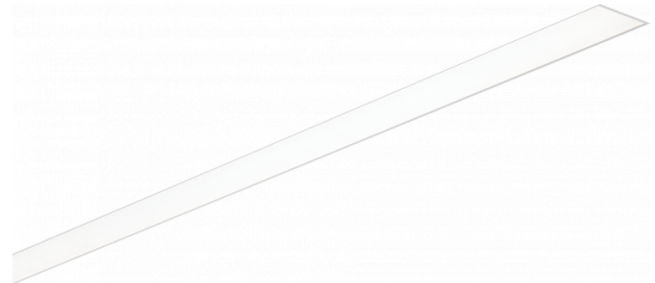

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

Lamp details

Lamptype	LED 4000K
Wattage	3,2W
Gross luminous flux	4725
Luminaire power	24,6W
Number	7
Lifetime LED module	L80/B10 > 102000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	>19
CIE Fluxcode	49 80 96 100 66

Dimensions

A	1964 mm
---	---------

Remarks

Recessed luminaire (trimless) - Direct - HO 150mA - satin (flush) - ANO

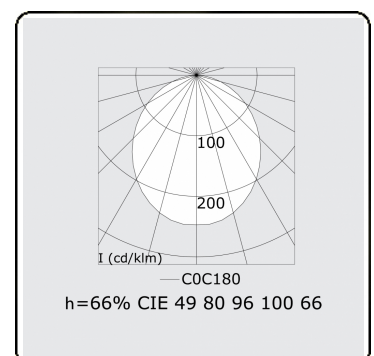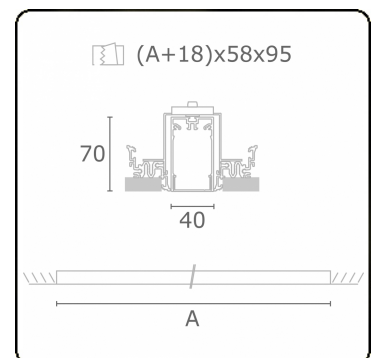




A

B

C

D

E

F

G

Verkrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ

kWh/1000h

MULTILINE®

2019/2015