


Rekta 40x70 Direct - satin - HO 150mA - ANO  
07.09204594-0001

#### Fixture details

|                 |                  |
|-----------------|------------------|
| Mounting        | Ceiling recessed |
| Light emission  | Direct           |
| Fitting cover   | satin diffusor   |
| Protection rate | IP 20            |
| Housing         | Aluminium        |
| Finish          | anodized finish  |
| Certificates    | CE, ISO 9001     |

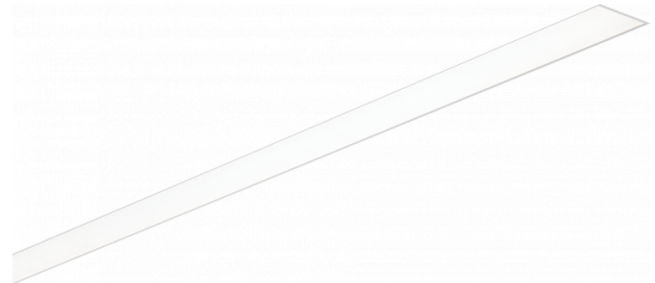

#### Electric details

|                  |                        |
|------------------|------------------------|
| Protection class | I                      |
| Supply           | 230V                   |
| Control gear box | Current driver DALI/TD |

#### Lamp details

|                     |                   |
|---------------------|-------------------|
| Lamptype            | LED 4000K         |
| Wattage             | 3,2W              |
| Gross luminous flux | 6075              |
| Luminaire power     | 31,6W             |
| Number              | 9                 |
| Lifetime LED module | L80/B10 > 102000h |
| Color tolerance     | MacAdam 3         |
| CRI                 | >80               |

#### Photometric details



|              |                 |
|--------------|-----------------|
| UGR          | >19             |
| CIE Fluxcode | 49 80 96 100 66 |

#### Dimensions

|   |         |
|---|---------|
| A | 2524 mm |
|---|---------|

#### Remarks

Recessed luminaire (trimless) - Direct - HO 150mA - satin (flush) - ANO

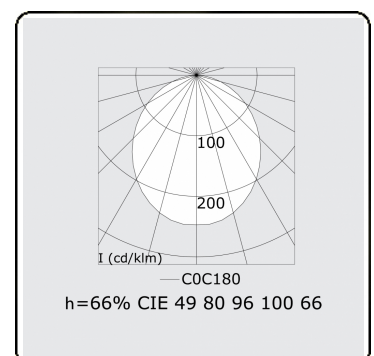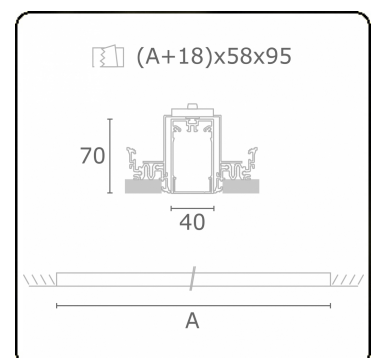




Verkrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

**WXYZ**

kWh/1000h

**MULTILINE®**

2019/2015