

Nhua - satin - HO 325mA - ANO
05.19004653-0001

Fixture details

Mounting	Ceiling
Light emission	Direct-Indirect
Fitting cover	satin diffusor
Protection rate	IP 40
Housing	Aluminium
Finish	anodized finish
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

Lamp details

Lamptype	LED 3000K
Wattage	7,1W
Gross luminous flux	6725
Luminaire power	39,3W
Number	5
Lifetime LED module	L80/B10 > 102000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	>19
CIE Fluxcode	34 61 83 76 75

Dimensions

A	1414 mm
---	---------

Remarks

Ceiling luminaire - HO 325mA - satin - ANO

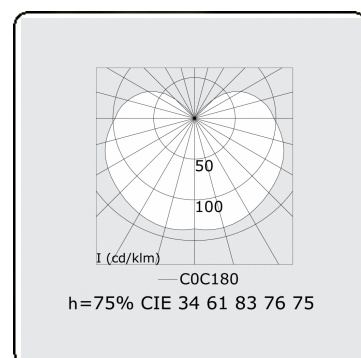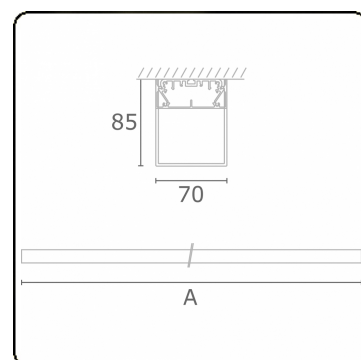

ENERGY

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

A

B

C

D

E

F

G



WXYZ

kWh/1000h

MULTILINE®

2019/2015