

Punto - Prismatic lens - ND - RAL 9003 / RAL 9005
05.34110104-9005

Fixture details



Mounting	3-circuit track
Light emission	Spotlight
Fitting cover	prismatic lens
Protection rate	IP 20
Housing	Aluminium
Finish	RAL 9005 Jet black
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 4000K 20°
Wattage	31W
Luminaire power	31W
Luminaire luminous flux	2870
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	>90

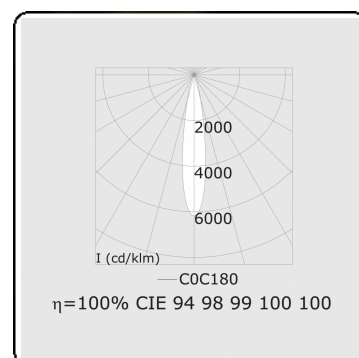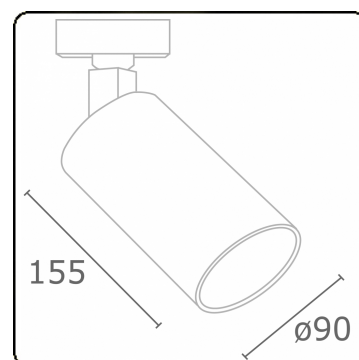

ENERGY

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

MULTILINE®

A

B

C

D

E

F

G

WXYZ

kWh/1000h

2019/2015