

Biko Direct - satin (black ribbed) - HO 150mA - RAL/RAL
04.44050583-9999

Fixture details

Mounting	Pendant
Light emission	Direct
Fitting cover	satin diffusor - ribbed black
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 3000K
Wattage	3,2W
Gross luminous flux	5080
Luminaire power	28,1W
Number	8
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	>19
CIE Fluxcode	68 90 98 100 9

Dimensions

A	2256 mm
---	---------

Remarks

Suspended luminaire - Direct - HO 150mA - satin (black ribbed) - RAL/RAL

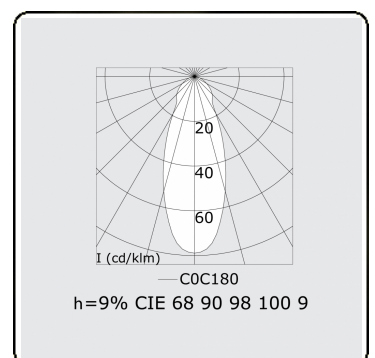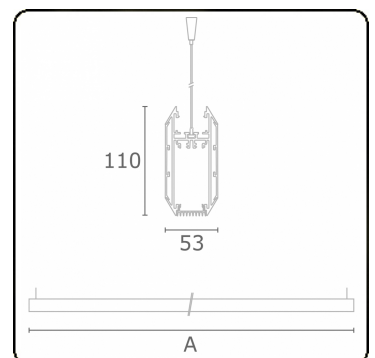




Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ
kWh/1000h

MULTILINE®

2019/2015