

Biko Direct - satin (black ribbed) - HO 325mA - ANO Brass/RAL ( 04.44050644-0599

**Fixture details**

Mounting	Pendant
Light emission	Direct
Fitting cover	satin diffusor - ribbed black
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001



**Electric details**

Protection class	I
Supply	230V
Control gear box	Current driver

**Lamp details**

Lamptype	LED 4000K
Wattage	7,1W
Gross luminous flux	5700
Luminaire power	31,4W
Number	4
Lifetime LED module	L80/B10 > 102000h
Color tolerance	MacAdam 3
CRI	>80

**Photometric details**



UGR	>19
CIE Fluxcode	68 90 98 100 9

**Dimensions**

A	1136 mm
---	---------

**Remarks**

Suspended luminaire - Direct - HO 325mA - satin (black ribbed) - ANO Brass/RAL

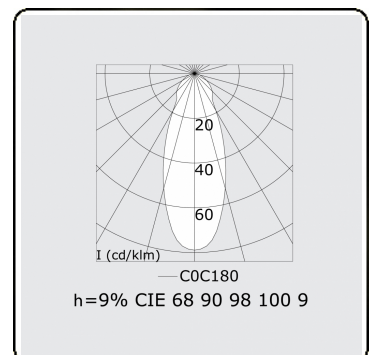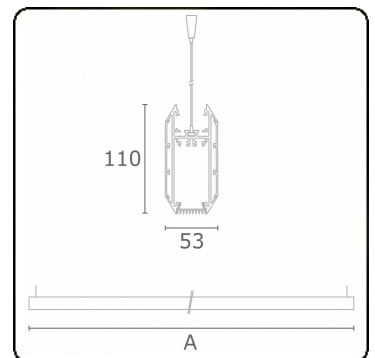

**ENERGY**

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

**WXYZ**  
kWh/1000h

**MULTILINE®**

2019/2015