

Biko Direct/Indirect - VDT - LO 500mA - ANO Brass/RAL
04.44120284-0599

Fixture details

Mounting	Pendant
Light emission	Direct-Indirect
Fitting cover	VDT louvre
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 4000K
Wattage	5,6W
Gross luminous flux	15975
Luminaire power	93,1W
Number	15
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details




UGR	<19
CIE Fluxcode	93 99 100 100 61
CIE Fluxcode Indirect	00 00 00 00 51

Dimensions

A	2256 mm
---	---------

Remarks

Suspended luminaire - Direct/Indirect - LO 500mA - VDT louvre - ANO Brass/RAL

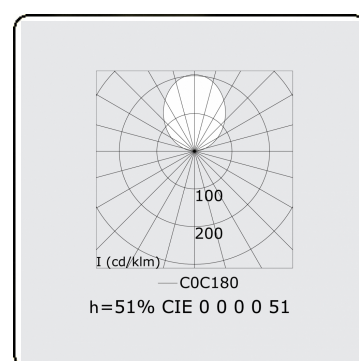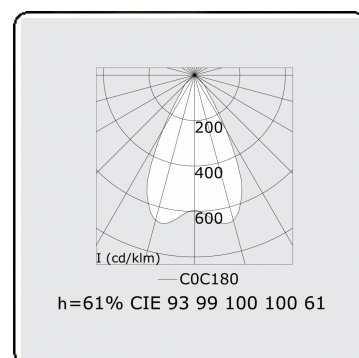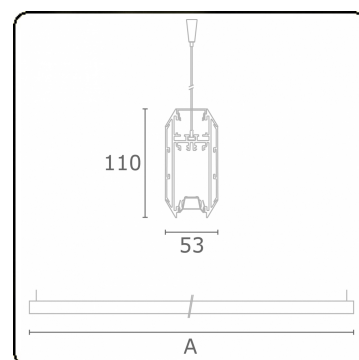

Verkrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ
kWh/1000h

2019/2015