

Edge 55 S Direct/Indirect - MPO - HO 150mA - RAL  
04.74114584-9999

**Fixture details**

Mounting	Pendant
Light emission	Direct-Indirect
Fitting cover	micro prismatic diffuser
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001

**Electric details**

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

**Lamp details**

Lamptype	LED 4000K
Wattage	3,2W
Gross luminous flux	10125
Luminaire power	52,7W
Number	15
Lifetime LED module	L80/B10 > 102000h
Color tolerance	MacAdam 3
CRI	>80

**Photometric details**




UGR	>19
CIE Fluxcode	58 89 98 100 50
CIE Fluxcode Indirect	00 00 00 00 73

**Dimensions**

A	2256 mm
---	---------

**Remarks**

Suspended luminaire - Direct/Indirect - HO 150mA - MPO - RAL

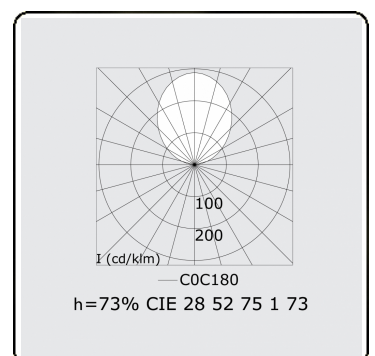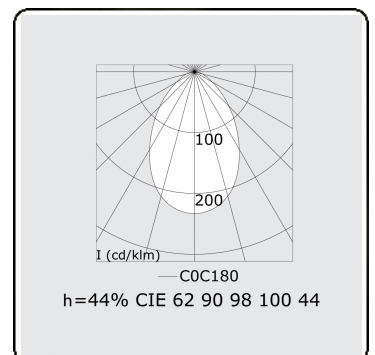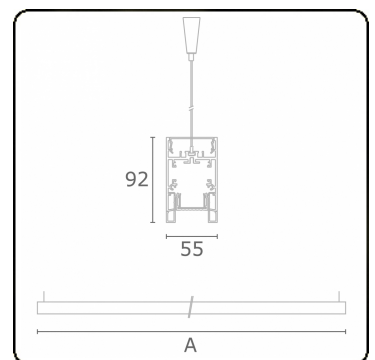

**ENERGY**

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

**WXYZ**  
kWh/1000h

**MULTILINE®**

2019/2015