

Edge 55 S Direct/Indirect - satin - HO 150mA - RAL
06.74104553-9999

Fixture details

Mounting	Wall
Light emission	Direct-Indirect
Fitting cover	satin diffusor
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

Lamp details

Lamptype	LED 3000K
Wattage	3,2W
Gross luminous flux	6350
Luminaire power	35,2W
Number	10
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details



UGR	>19
CIE Fluxcode	56 85 98 99 53
CIE Fluxcode Indirect	00 00 00 00 73

Dimensions

A	1416 mm
---	---------

Remarks

Wall luminaire - Direct/Indirect - HO 150mA - satin (flush) - RAL

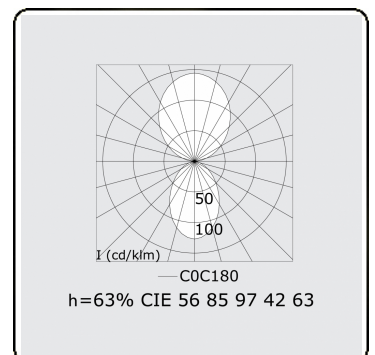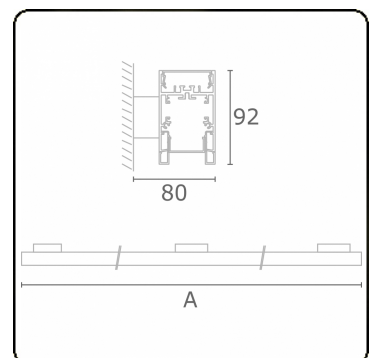

ENERGY

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

MULTILINE®

A

B

C

D

E

F

G

WXYZ

kWh/1000h

2019/2015