MULTILINE®
bright with light

Tube 70 T2 - satin - HO 150mA - standard
35.90034534-0000

Fixture details

Mounting	Wall
Light emission	Direct
Fitting cover	satin diffusor
Protection rate	IP 65
Housing	Polycarbonate/PMMA
Finish	frosted
Certificates	CE, ISO 9001




Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD


Lamp details

Lamptype	LED 4000K
Wattage	3,2W
Gross luminous flux	2025
Luminaire power	10,5W
Number	3
Lifetime LED module	L80/B10 > 102000h
Color tolerance	MacAdam 3
CRI	>80

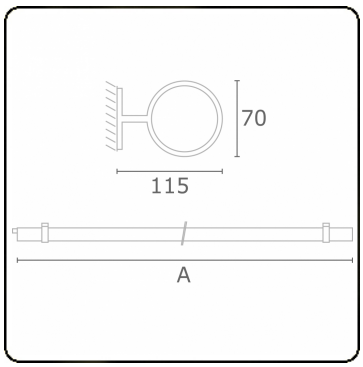

Photometric details

CIE Fluxcode	45 74 91 93 85

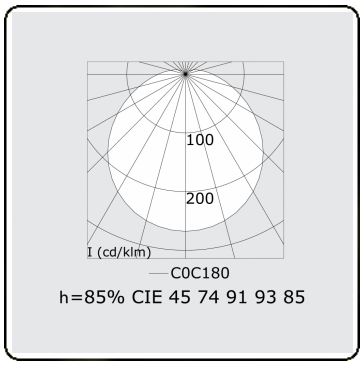

Dimensions

A	920 mm

Remarks

Wall luminaire - satin - HO 150mA - standard

