MULTILINE®
bright with light

Rekta 65x65 Direct - VDT - HO 150mA - ANO
05.94024503-0001

Fixture details

Mounting	Ceiling
Light emission	Direct
Fitting cover	VDT louvre
Protection rate	IP 20
Housing	Aluminium
Finish	anodized finish
Certificates	CE, ISO 9001




Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

Lamp details

Lamptype	LED 3000K
Wattage	3,2W
Gross luminous flux	6350
Luminaire power	35,2W
Number	10
Lifetime LED module	L80/B10 > 102000h
Color tolerance	MacAdam 3
CRI	>80

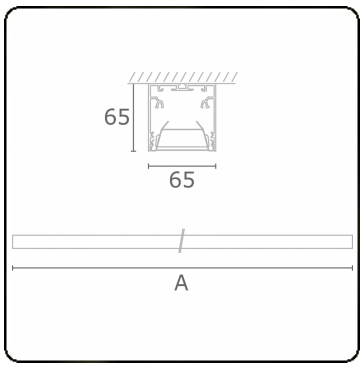

Photometric details

UGR	<19
CIE Fluxcode	80 99 100 100 76

Dimensions

A	2810 mm

Remarks

Ceiling luminaire - Direct - HO 150mA - VDT - ANO

