

**Metro-D Ø360mm - 30° adjustable - with recessed housing**  
**36.07091-0000**

**Fixture details**

Mounting	Ground - recessed
Light emission	Indirect - adjustable
Light distribution	adjustable
Fitting cover	Glass
Protection rate	IP 67
Maximum load	5000 kg drive-across (including recessing housi
T°	<75 °
Housing	Aluminium/Stainless Steel
Finish	matt black finish RAL 9105
Certificates	CE, ISO 9001



**Electric details**


Protection class	I
Supply	230V
Control gear box	Current driver

**Lamp details**

Lamptype	LED 3000K 32°
Wattage	20x1W
Gross luminous flux	2520
Luminaire power	22W
Cover glass	flat - clear
Number	1
Lifetime LED module	L70/B50 > 60000h
Color tolerance	MacAdam 3
CRI	80

**Photometric details**

CIE Fluxcode	0 0 0 0 73
--------------	------------

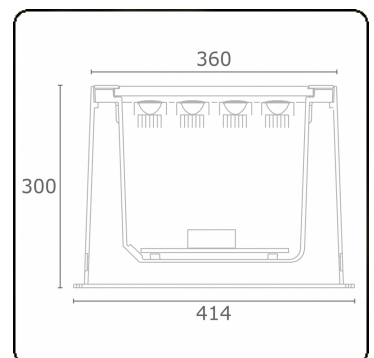

**Remarks**

Ø360mm - clear glass - strips are individually adjustable up to 30°

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

**A++**

**A+**

**A**

**B**

**C**

**D**

**E**

**LED**

**MULTILINE®**

36.07091-0000

874/2012