

Rekta 40 T2 Direct - satin - HO 325mA - ANO
06.08004623-0001

Fixture details

Mounting	Wall
Light emission	Direct
Fitting cover	satin diffusor
Protection rate	IP 20
Housing	Aluminium
Finish	anodized finish
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

Lamp details


Lamptype	LED 3000K
Wattage	7,1W
Gross luminous flux	2690
Luminaire power	15,7W
Number	2
Lifetime LED module	L80/B10 > 72000h
Color tolerance	MacAdam 3
CRI	80

Photometric details

UGR	>19
CIE Fluxcode	49 80 96 100 66

Dimensions

A	594 mm
B	594 mm

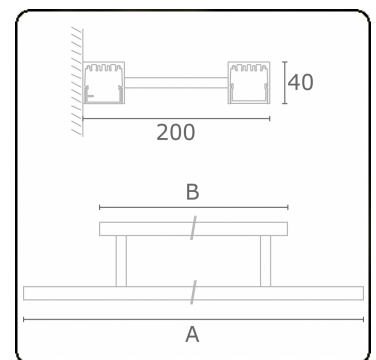

Verrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ
kWh/1000h

2019/2015