MULTILINE®
bright with light

Linea
35.60729-9910

Fixture details

Light emission	Direct
Fitting cover	Glass
Protection rate	IP 65
Housing	Aluminium
Finish	RAL 9016 traffic white textured
Certificates	CE, ISO 9001




Electric details

Protection class	I
Supply	230V
Control gear box	Current driver

Lamp details

Lamptype	LED 3000K
Wattage	3W
Gross luminous flux	305
Luminaire power	6W
Number	1
Lifetime LED module	L80/B10 = 50000h
Color tolerance	MacAdam 3
CRI	85

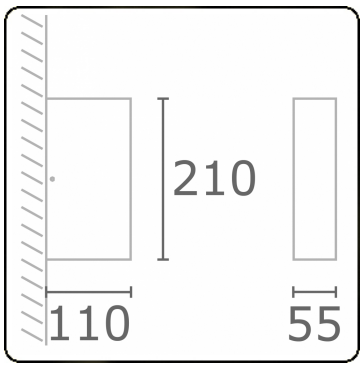

Photometric details

CIE Fluxcode	73 94 99 100 79

Remarks

direct or indirect light output

