

Grip T2 - Direct - LRLB - 150mA - RAL - R
11.43556443-9999

Fixture details

Mounting	Ground
Light emission	Direct
Fitting cover	Louvre optic - black matt
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

Lamp details



Lamptype	LED 3000K
Wattage	6,0W
Gross luminous flux	4200
Luminaire power	26,4W
Number	4
Lifetime LED module	L90/B50 > 50000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details

UGR	<19
CIE Fluxcode	99 99 100 99 81

Remarks

Staande armatuur - Direct - 150mA - LRLB optiek - RAL - rechthoek

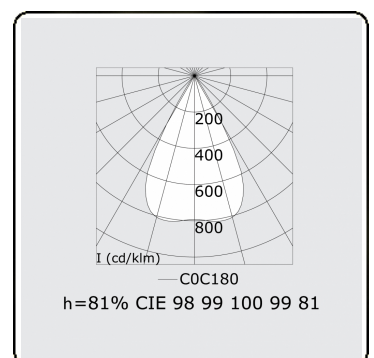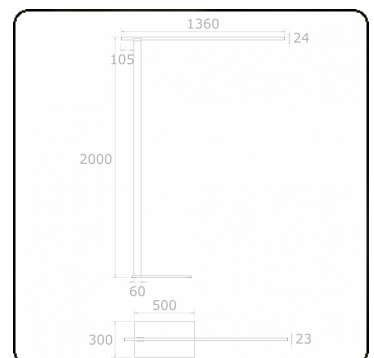

Verkrijgbaar op aanvraag.

Disponible sur demande.

Available on request.

Auf Anfrage.

WXYZ
kWh/1000h

MULTILINE®

2019/2015