

Rekta 30x90 Direct - VDT - LO 400mA - RAL
07.13454104-9999

Fixture details

Mounting	Ceiling recessed
Light emission	Direct
Fitting cover	Louvre optic - black matt
Protection rate	IP 20
Housing	Aluminium
Finish	RAL colour at your choice
Certificates	CE, ISO 9001

Electric details

Protection class	I
Supply	230V
Control gear box	Current driver DALI/TD

Lamp details

Lamptype	LED 4000K
Wattage	4,4W
Gross luminous flux	8650
Luminaire power	48,9W
Number	10
Lifetime LED module	L80/B10 > 102000h
Color tolerance	MacAdam 3
CRI	>80

Photometric details


UGR	<19
CIE Fluxcode	98 100 100 99 84

Dimensions

A	2815 mm
---	---------

Remarks

Recessed luminaire (trimless) - Direct - LO 400mA - VDT louvre - RAL

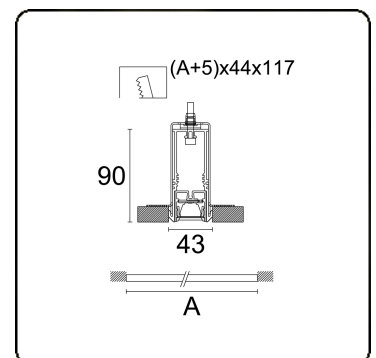

A

Verrijgbaar op aanvraag.

B

Disponible sur demande.

C

Available on request.

D

Auf Anfrage.

E

F

G

WXYZ

kWh/1000h

MULTILINE®

2019/2015